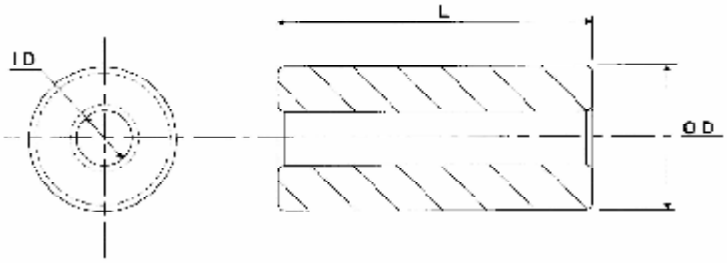

Round Brass Spacer

Type	I D	O D	Length * L mm																								
RBS	2.2	4.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	20	25	30	-	-	-	-	
RBS	2.6	5.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	20	25	30	-	-	-	-	
RBS	3.2	6.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	20	25	30	35	40	45	50	
RBS	4.3	8.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	20	25	30	35	40	45	50	
RBS	5.3	10.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	20	25	30	35	40	45	50	

Material: Brass Finish: Electro-nickel plated

All dimensions in mm

Round Nylon Spacer

Type	I D	O D	Length * L mm																								
RPS	2.6	5.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	30
RPS	3.2	6.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	30
RPS	4.3	8.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	30
RPS	5.3	10.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	30
RPS	6.4	10.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	30
RPS	7.3	20.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	30
RPS	8.4	20.0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	18	19	20	21	22	23	24	25	30

Material: Nylon 66 Colour: Natural

All dimensions in mm

Screwlock Pillars



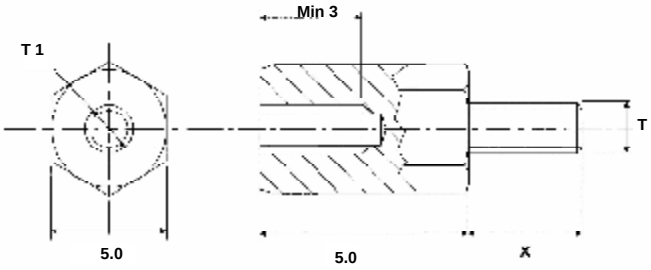

Screw Lock pillars - Brass

Type	T	T 1	Length * L mm		
SLPB	M3	M3	6	8	12
SLPB	M3	4-40unc	6	8	12
SLPB	4-40unc	M3	6	8	12
SLPB	4-40unc	4-40unc	6	8	12

Material: Brass Finish: Electro-nickel plated

Screw Lock pillars - Steel

All dimensions in mm

Type	T	T 1	Length * L mm		
SLPS	M3	M3	6	8	12
SLPS	M3	4-40unc	6	8	12
SLPS	4-40unc	M3	6	8	12
SLPS	4-40unc	4-40unc	6	8	12

Material: Steel Finish: Electro-Zinc plated

How to order: **RPS — 3.2— 6.0 — 25**

Type
Thread
A/F
Length

* Non-standard body lengths available on request.

ISO 9001 : 2000
REGISTERED FIRM

PDF created with pdfFactory trial version www.pdffactory.com